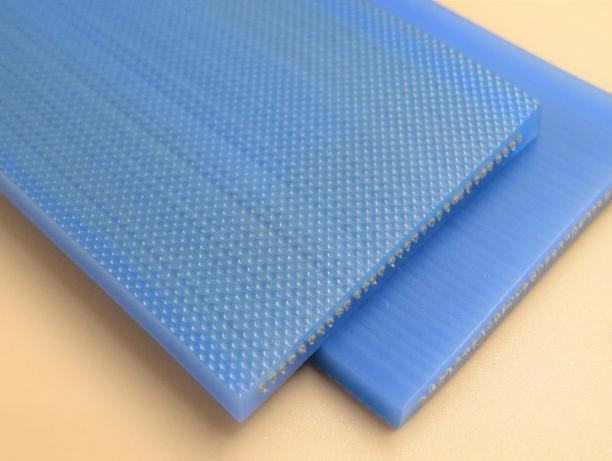


Technical Datasheet		CFTG™ Belt type	Power Transmission Belt <b>CFTG-60N-4.0</b> CF-038 ver.0
<b>Applications</b>			
<ul style="list-style-type: none"> <li>Live roller conveyor</li> </ul>			
<b>Construction</b>			
		Top side TPU Rough pattern Blue	Bottom side TPU Flat Blue
Tension member Aramid Cord		Splice Finger splice (10×200)	
Construction			
<b>Dimensions</b>		<b>Properties</b>	
Width	30,45 mm	<b>Dynamic properties</b>	
Length	1,000~160,000 mm	Standard elongation	0.5 %
Total thickness	4.0 mm	Tension after relaxation at 0.5%	60 N/mm
Weight	4.9 kg/m <sup>2</sup>	Operation temperature range	-10~60 °C
Please contact Nitta if you need other dimensions.		<b>Minimum pulley diameter</b>	
		Minimum pulley diameter	80 mm
<b>Regulatory compliance</b>		<b>Tensile properties</b>	
		Tensile strength	700 N/mm
		Elongation at break	3.5 %
		Maximum allowable elongation	1.0 %
<b>Features</b>		<b>Coefficient of friction</b>	
		Top side vs. Steel	0.5~0.6
		Bottom side vs. Steel	0.5~0.6