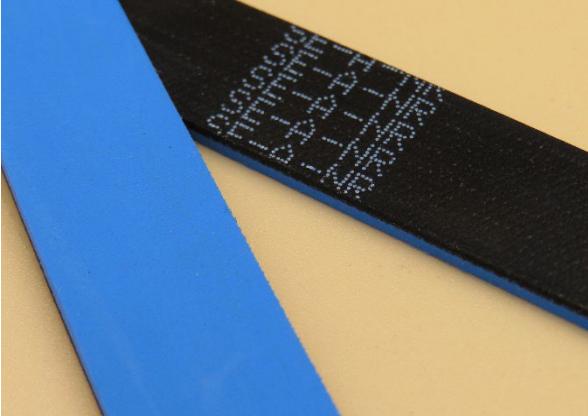


Technical Datasheet		SEB™ Belt type	SE-A-NR	SC-006 ver.4
Applications				
<ul style="list-style-type: none"> Folder gluer(Feeder section) Feeder belt 				
Construction				
	Ground side (Conveyance side) Natural rubber Blue Hardness:A/50/1	Glossy side (Pulley side) Chloroprene rubber Black	Tension member Polyester Cord	Splice Seamless
				
Dimensions		Properties		
Width	7~400mm	Dynamic properties		
Length	400~1970mm	Standard elongation 0.5%		
Standard thickness	8.0mm	Tension after relaxation at 0.5% 3.7N/mm		
Range of thickness	2~14mm	Operation temperature range -20~60°C		
Weight	10.2 kg/m ²	Minimum pulley diameter		
<small>Please contact Nitta if you need other dimensions.</small>				
Regulatory compliance		When of standard thickness 80mm		
RoHS(2011/65/EC),(EU)2015/863)		<small>*Except for standard thickness, minimum pulley diameter is ten times the belt thickness.</small>		
Features		Tensile properties		
Antistatic High grip Cushioning property		Tensile strength 58.8N/mm		
		Elongation at break 10%		
		Maximum allowable elongation 0.5~1.0%		
Coefficient of friction		Ground side vs. Paper Approx.1.5		
		Glossy side vs. Steel 0.2~0.4		