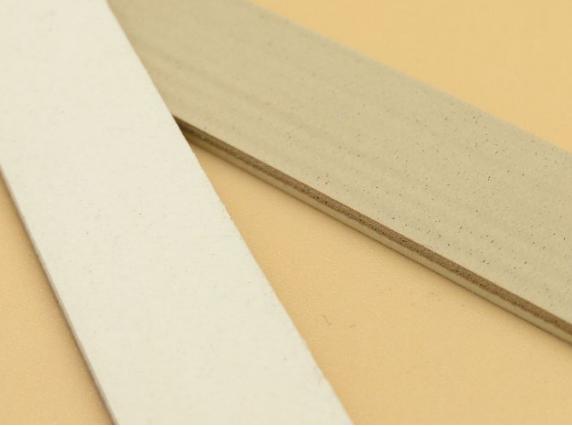


Technical Datasheet		SEB™ Belt type	SE-A-WN	SC-018 ver.4							
Applications											
<ul style="list-style-type: none"> Folder gluer(Feeder section) Feeder belt 											
Construction											
		Ground side (Conveyance side)	Glossy side (Pulley side)								
Natural rubber		Chloroprene rubber									
White		White									
Hardness:A/35/1											
		Tension member	Splice								
Polyester		Seamless									
Cord											
Construction											
Dimensions											
Width	7~400mm										
Length	400~1970mm										
*Depending on mold size											
Standard thickness	8.0mm										
Range of thickness	2~12mm										
Weight	10.2 kg/m ²										
Please contact Nitta if you need other dimensions.											
Regulatory compliance											
RoHS(2011/65/EC),(EU)2015/863)											
Features											
High grip											
Cushioning property											
Keep conveyed goods clean											
Properties											
Dynamic properties											
Standard elongation											
0.5%											
Tension after relaxation at 0.5%											
3.7N/mm											
Operation temperature range											
-20~60°C											
Minimum pulley diameter											
When of standard thickness											
80mm											
*Except for standard thickness, minimum pulley diameter is ten times the belt thickness.											
Tensile properties											
Tensile strength											
58.8N/mm											
Elongation at break											
10%											
Maximum allowable elongation											
0.5~1.0%											
Coefficient of friction											
Ground side vs. Paper											
Approx.2.0											
Glossy side vs. Steel											
0.2~0.4											